www.akbyramon.com

C/ Rafael Riera Prats, 49
08339 Vilassar de Dalt
Barcelona - Spain
Tel. (+34) 937.531.311

VAC LINE
SEALING LINE
FOOD PROCESSING LINE


# INDUSTRIAL VACUUM PACKER AK-RAMON VP-1100 TBA 300

## GENERAL CHARACTERISTICS



- Totally manufactured in AISI 304 stainless steel.
- Lid cover of AISI 304 Stainless steel.
- Automatic or semi-automatic lid opening system.
- Double sealing.
- Sealing with pneumatic cylinder.
- Progressive atmosphere (Soft Air).
- Gas flushing entrance.
- Vacuum and gas control by sensor.
- Digital control panel with 99 memory programs.
- Equipped with polyethylene for faster packaging and easier bag placement.
- Easy maintenance.
- Pump Busch 302 $m^3/h$.
- Voltage : 400 V/ 3ph/ 50 Hz.

## OPTIONS

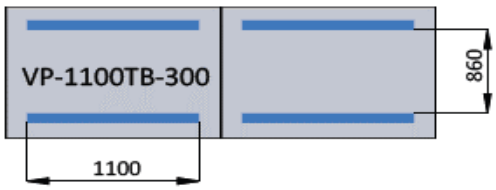



- Cut of the bag.
- Independent control of sealing and cutting.

## TECHNICAL INFORMATION


| | VP-1100 TBA 300 |
|---|---|
| **Pump capacity** | 302$m^3/h$ |
| **Pump Power HP/Kw** | 6.3/4.63 |
| **Chamber dimensions (mm)** | 1246x1018x250 |
| **Packaging dimensions (mm)** | 2590x1280x1280 |
| **Net/Gross weight (Kg)** | 925/945 |

## DIMENSIONS IN MM

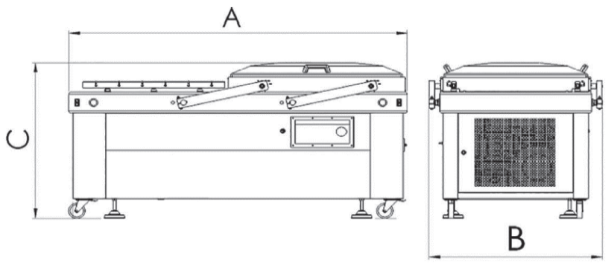



| | A | B | C |
|---|---|---|---|
| VP-1100 TBA 300 | 2.530 | 1.250 | 1.150 |

## TYPE OF SEALING




DOUBLE
SEALING



SIMPLE
SEALING + CUT

## CONTROL PANEL

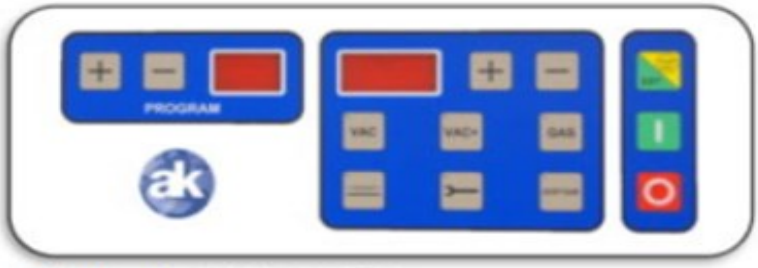


**Control Panel by sensor**

- Digital control panel.
- Vacuum control by sensor.
- Gas flushing entrance control by sensor.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- VAC+ push button, additional vacuum time
- Maintenance push button control.
- 99 memory positions.
- Monitoring step by step of the cycle through led.