
SB46-08

Splitter band saw



Splitter band saw for pigs / sheep (high throughput plants) and cattle (medium plants) in a combination slaughter line

- If using a low gambrel, halving of pigs is only possible with restrictions (in such cases SB49-08)




The basic model has the following standard equipment:

- Manual blade tensioning system MAN with lever blade guides HF
- Machine safety switch (cover sensor) MSS
- Water hose unit
- 5 replacement saw blades
- Inbuilt disinfection system DES-E



Optional:

- Automatic tensioning system (hydraulic) for rapid band saw blade exchange and optimum blade tension at all times AUT with automatic band saw blade rotation for rapid band saw blade exchange with adjustable blade guides JF
- Two-hand safety switch 2HATD
- DES-PO7 inbuilt disinfection kit

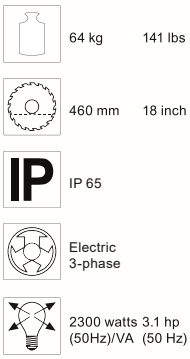


SB49-08

Splitter band saw



Splitter band saw

- Particularly suited to expansion brace slaughtering due to the low height (front: 300mm)
- Splitting of cattle is only possible with limitations for this reason




The basic model has the following standard equipment:

- Manual blade tensioning system MAN with lever blade guides HF
- Machine safety switch (cover sensor) MSS
- Water hose unit
- 5 replacement saw blades
- Inbuilt disinfection system DES-E



Optional:

- Automatic tensioning system (hydraulic) for rapid band saw blade exchange and optimum blade tension at all times AUT
- Automatic band saw blade rotation for rapid band saw blade exchange with adjustable blade guides JF
- Electrical water valve EWV
- Two-hand safety switch 2HATD

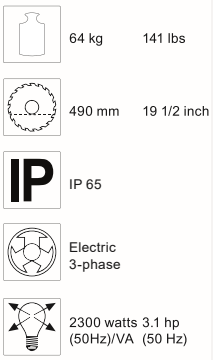

FREUND
GERMAN QUALITY SLAUGHTER-TOOLS

SB50-08

Splitter band saw

Splitter band saw for cattle and sows in high throughput plants

The basic model has the following standard equipment:

- Manual blade tensioning system MAN
- Lever - blade guides HF
- Machine safety switch (cover sensor) MSS
- Water hose unit
- 5 replacement saw blades
- Inbuilt disinfection system DES-E

Optional:

- Automatic tensioning system (hydraulic) for rapid band saw blade exchange and optimum blade tension at all times AUT
- Automatic band saw blade rotation for rapid band saw blade exchange with adjustable blade guides JF
- Electrical water valve EWV
- Two-hand safety switch 2HATD



74 kg 163 lbs

500 mm 19 1/2 inch


IP65

Electric 3-phase

2300 watts 3.1 hp (50Hz)/VA (50Hz)

SK40-08L

Circular splitting saw



Circular splitting saw for slaughtering pigs in high throughput plants

- Circular saw blade, coarse tooth, splitting, low-noise, rust-free KGZ400SPGA
- With smooth cable GK
- Long gear neck
- Two-hand safety switch
- Water connection with spiral hose for cooling and rinsing the cutting surface
- With 2 guide rollers for splitting from the rear

36 kg 79 lbs

400 mm 15 3/4 inch

145 mm 5 1/2 inch

IP 65

Electric 3-phase

2300 watts 3.1 hp (50Hz)/VA (50Hz)

SK52-08L

Circular splitting saw



Circular splitting saw for slaughtering pigs in high throughput plants (sows to some extent)

- Circular saw blade, coarse tooth, splitting, low-noise, rust-free KGZ520SPGA
- With smooth cable GK
- Two-hand safety switch
- Water connection with spiral hose for cooling and rinsing the cutting surface
- With 2 guide rollers for splitting from the rear

41 kg 90 lbs

520 mm 20 1/2 inch

205 mm 8 inch

IP 65

Electric 3-phase

2300 watts 3.1 hp (50Hz)/VA (50Hz)