ZKM75-08-DA

Circular cutting knife

Circular cutting knife for low-loss coarse cutting of horizontal carcasses, e.g. on a cutting belt conveyor

- Manual or electromotive lifting of the blade up to 200 mm above the cutting belt
- Space-saving suspension of ceiling or frame structure (suspended installation) in cutting equipment




140 kg	309 lbs	
750 mm	30 inch	
300 mm	12 inch	
IP 65		
Electric 3-phase		
2300 watts (50Hz)/VA	3.1 hp (50Hz)	

ZKM60-08-DA-MS

Middle splitter circular knife

Circular knife for optimum separation of pig mid-sections in belly & cutlet series

- Space-saving suspension of ceiling or frame structure (suspended installation) in cutting equipment
- Continuous cutting angle adjustment +- 15° can be set for optimum yield

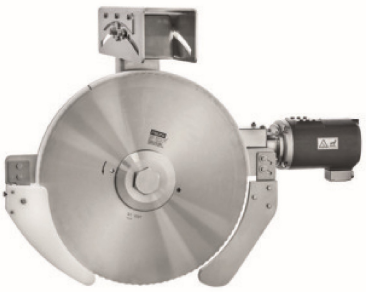

120 kg	265 lbs	
600 mm	23 1/2 inch	
175 mm	7 inch	
IP 65		
Electric 3-phase		
2300 watts (50Hz)/VA	3.1 hp (50Hz)	

ZKM75-08-DA-JHS

Circular cutting knife

Circular cutting knife for low-loss coarse cutting of horizontal carcasses, e.g. on a cutting belt conveyor

- Manual or electromotive lifting of the blade up to 200 mm above the cutting belt
- Space-saving suspension of ceiling or frame structure (suspended installation) in cutting equipment
- With lateral movement option



200 kg	440 lbs	
750 mm	30 inch	
300 mm	12 inch	
IP 65		
Electric 3-phase		
2300 watts (50Hz)/VA	3.1 hp (50Hz)	

UNI-PORTAL UP4

Universal portal frame


Universally combinable frame design


for ZKM circular breaking knife and other machines

- Diverse configuration options thanks to the modular design
- Straightforward adjustment of dimensions on-site

For easy set-up or integration of circular knives in cutting lines for example:

- ZKM75-08-DA
- ZKM60-08-DA-MS

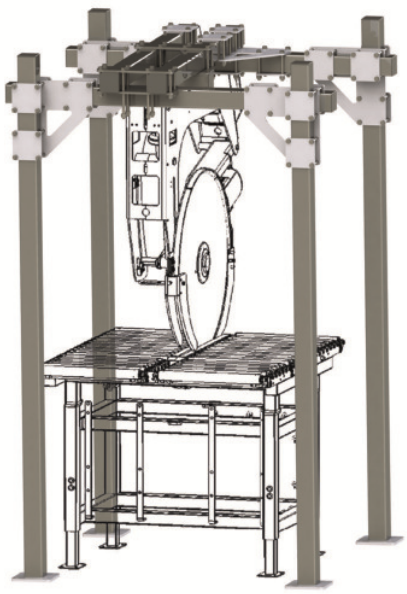



UNI-PORTAL UP3

Universal portal frame


Universally combinable frame design


for ZKM circular breaking knife and other machines

- Diverse configuration options thanks to the modular design
- Straightforward adjustment of dimensions on-site

For easy set-up or integration of circular knives in cutting lines for example:

- ZKM75-08-DA
- ZKM60-08-DA-MS

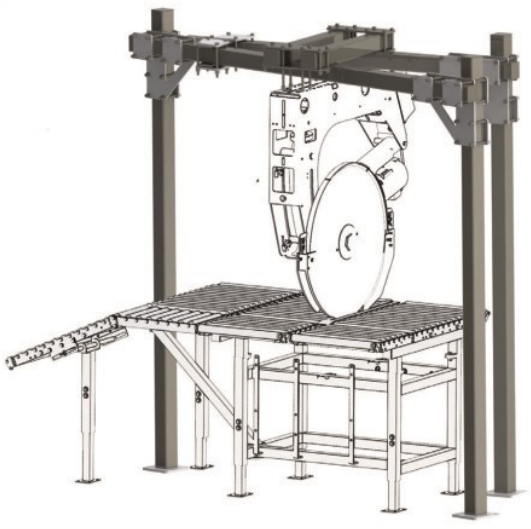



ZKM75-08-T


Circular cutting knife as a modular table version



Circular cutting knife for low-loss coarse cutting of horizontal carcasses, e.g. on a cutting belt conveyor

- Compact unit for pre-head positioning in advance of a pig/sheep cutting line
- Loss-free, cleaner and hygienic cut without any smearing
- One operator can coarse cut up to 160 pig halves (3 cuts) per hour
- Design: Table with modular, exchangeable roller frame
- Stainless steel circular knife **INOX / rust-free**
- GS-certified: EC type examination as per German Product Safety Act

300 kg	661 lbs	
750 mm	29 1/2 inch	
300 mm	12 inch	
IP 65		
Electric 3-phase		
2300 watts (50Hz)/VA	3.1 hp (50Hz)	

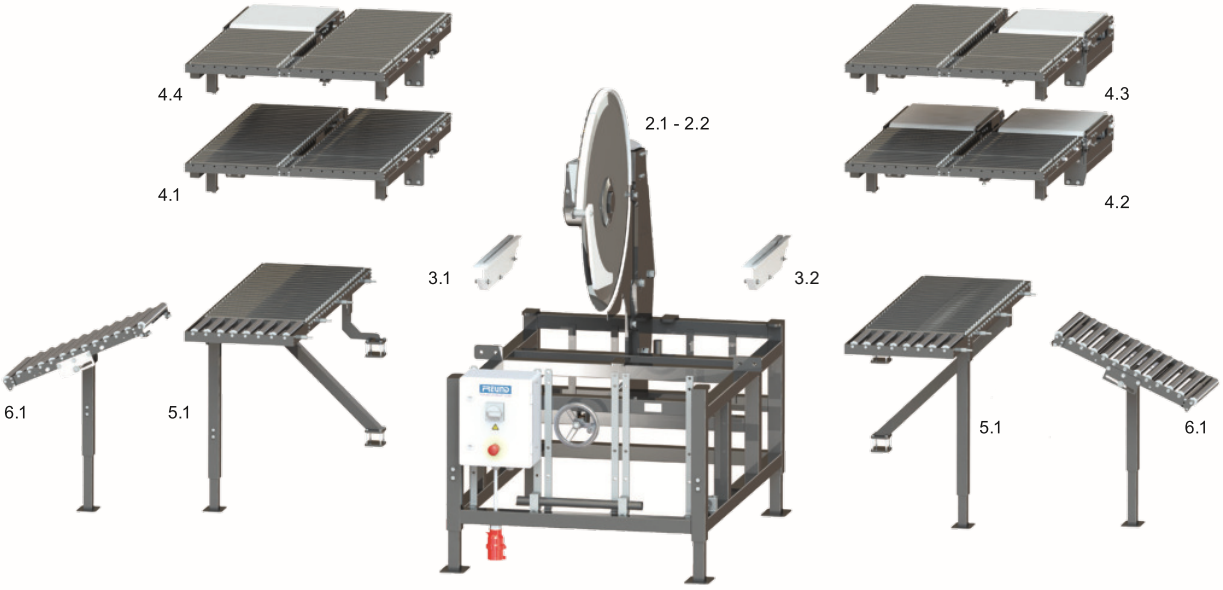

Item	Designation
1	ZKM75-08-T basic model
2.1	KM750S-1F circular knife for pigs
2.2	KM750S-2F circular knife for sheep
3.1	Guide insert for pigs
3.2	Guide insert for sheep
4.1	ZKM-T roller conveyors (left/right)
4.2	ZKM-T roller conveyors with conveyor belts (left/right)
4.3	ZKM-T roller conveyor with conveyor belt (right)
4.4	ZKM-T roller conveyor with conveyor belt (left)
5.1	Roller table attachment RTA
6.1	Buffer roller conveyor RTA
6.2	Buffer roller RTA
7.1	Transport rollers ZKM-T (4 rollers)
7.2	Transport rollers ZKM-T (6 rollers)
No details	Modular circular foot saw for lateral attachment

FK40-08

Circular-Feet-Cutting-Saw

Circular-Feet-Cutting-Saw for latter attachment of cutting equipment

- E meat crate can be kept as a chip box
- circular saw swivel-mounted on the tabletop for optimum cleaning
- completely encased, powerful bevel gear drive: specifically designed for use in slaughtering & cutting up
- stable stainless steel design **INOX / rust-free **
- left and right-hand version available respectively for installation on a table or belt (please specify)
- saw blade revolutions: 1170/min
- cutting speed: 1470 m/min.
- including electronic motor brake
- up to 1200 cuts per hour

58 kg	128 lbs	
400 mm	16 inch	
125 mm	5 inch	
IP 65		
Electric 3 phase		
2300 watts (50Hz)/VA	3,1 hp (50Hz)	



ZKM-T-2CB

Cutting Table with automatic discharge (foldable)

Space-saving cutting table with automatic discharge (foldable), suitable for use with ZKM60-08 DA MS

- Space-saving 1x1 design principle (1000x1000 mm work surface)
- Easy to clean thanks to folding table side parts
- Optimised assembly options thanks to easily accessible drum motors and optimised chain link belts, which means a significantly reduced assembly time
- Better flushing of the chain link belts
- Automatic removal of the product
- Significant reduction in bone fragments thanks to stable trough
- Aligned with ceiling-suspended ZKM-DA-MS and portal solutions

